

FLAT FACE - QCF SERIES

METRIC (L)



[CLICK HERE FOR 3D SECTION](#)

TECHNICAL FEATURES AND OPTIONS

- Locking Mechanism**
Locking Ball System
+Safety Lock
- Flow Rate**
Up to 189 l / min
- Material**
Carbon Steel
Stainless Steel
Brass
- Working Temperature**
-20 °C / +90 °C
- Interchange**
16028
- How to Connect**
Push
- Operating Pressure**
Up to 250 Bar
- Available Threads**
BSP - NPT - Metric - SAE
- Under Residual Pressure**
Connction: Not Allowed
Disconnection: Not Allowed
- Body Sizes**
ISO 6.3-25
- Sealing Description**
NBR - FKM
- Valve Type**
Flat Face

MAIN APPLICATIONS




INFORMATION

- Flat face design prevents dirt and dust accumulation in the system.
- Top quality elastomer seals provide maximum sealing and prevent oil leakage during disconnection.
- Laminar flow prevents pressure drops and turbulences.
- Durable, safe, compact and easy to use design.
- Please clean the mating surfaces thoroughly before connecting, in order to prevent contaminants to enter into the system.
- Please make sure that the male and female parts are aligned properly to achive full connection.
- Safety lock feature prevents accidental disconnection.

WARNING

- Connection and disconnection under dynamic pressure is not allowed.
- Connection and disconnection is not allowed when the temperature of the circulating fluid is above 80°C / 176°F.
- Make sure the system pressure is below the maximum working pressure.
- Please ensure that the OLEOCON product you have chosen is compatible with the temperature , material and pressure requirements of your system.
- Please contact OLEOCON technical support for any further questions.

TECHNICAL DRAWING

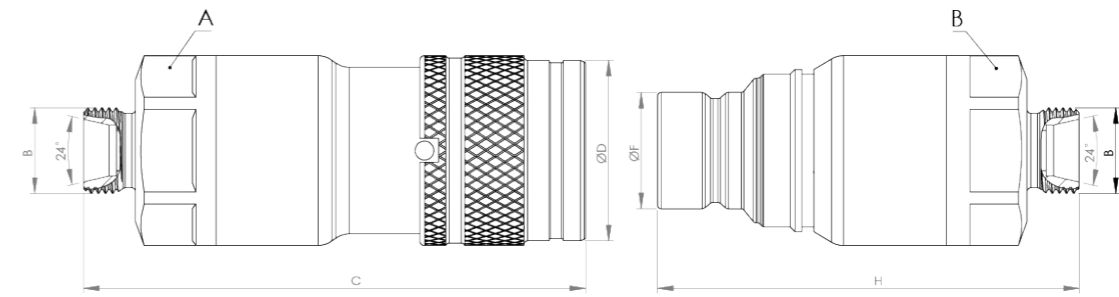

BODY SIZE	DESCRIPTION	COUPLING GENDER	Hex		THREAD SIZE(B)	DIAMETER		LENGTH		WEIGHT				
			mm	inch		mm	inch	mm	inch	kg	lbs			
06	QCF-6A-8L	FEMALE	A	26	1,02	M14*1,5	D	28	1,1	C	82	3,22	0,24	0,53
	QCF-6B-8L	MALE	E	26	1,02	M14*1,5	F	16,15	0,64	H	72	2,83	0,16	0,35
	QCF-6A-10L	FEMALE	A	26	1,02	M16*1,5	D	28	1,1	C	83	3,27	0,24	0,53
	QCF-6B-10L	MALE	E	26	1,02	M16*1,5	F	16,15	0,64	H	73	2,87	0,16	0,35
10	QCF-10A-10L	FEMALE	A	30	1,18	M16*1,5	D	32	1,25	C	84	3,30	0,38	0,84
	QCF-10B-10L	MALE	E	30	1,18	M16*1,5	F	19,7	0,77	H	74	2,91	0,24	0,53
	QCF-10A-12L	FEMALE	A	30	1,18	M18*1,5	D	32	1,25	C	83	3,26	0,38	0,84
	QCF-10B-12L	MALE	E	30	1,18	M18*1,5	F	19,7	0,77	H	73	2,87	0,24	0,53
12.5	QCF-10A-15L	FEMALE	A	30	1,18	M22*1,5	D	32	1,25	C	83	3,26	0,39	0,86
	QCF-10B-15L	MALE	E	30	1,18	M22*1,5	F	19,7	0,77	H	73	2,87	0,25	0,55
	QCF-12A-12L	FEMALE	A	36	1,41	M18*1,5	D	38	1,49	C	99	3,89	0,63	1,39
	QCF-12B-12	MALE	E	36	1,41	M18*1,5	F	24,5	0,96	H	82	3,22	0,4	0,88
19	QCF-12A-15L	FEMALE	A	36	1,41	M22*1,5	D	38	1,49	C	98	3,85	0,63	1,39
	QCF-12B-15L	MALE	E	36	1,41	M22*1,5	F	24,5	0,96	H	81	3,18	0,4	0,88
	QCF-12A-18L	FEMALE	A	36	1,41	M26*1,5	D	38	1,49	C	98	3,85	0,63	1,39
	QCF-12B-18L	MALE	E	36	1,41	M26*1,5	F	24,5	0,96	H	81	3,18	0,4	0,88
25	QCF-19A-18L	FEMALE	A	41	1,61	M26*1,5	D	46,1	1,81	C	116	4,56	0,98	2,16
	QCF-19B-18L	MALE	E	41	1,61	M26*1,5	F	29,9	1,17	H	97	3,81	0,6	1,32
	QCF-19A-22L	FEMALE	A	41	1,61	M30*2	D	46,1	1,81	C	115	4,52	0,97	2,13
25	QCF-19B-22L	MALE	E	41	1,61	M30*2	F	29,9	1,17	H	96	3,77	0,59	1,30
	QCF-25A-28L	FEMALE	A	50	1,96	M36*2	D	55	2,16	C	123	4,84	1,5	3,30
	QCF-25B-28L	MALE	E	50	1,96	M36*2	F	36	1,41	H	106	4,17	0,92	2,02

ISO 8434-1

BODY SIZE	WORKING PRESSURE						BURST PRESSURE					
	COUPLE		FEMALE		MALE		COUPLE		FEMALE		MALE	
	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI
6	31,5	4568	31,5	4568	31,5	4568	126	18270	126	18270	126	18270
10	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
12.5	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
19	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
25	20	2900	20	2900	20	2900	80	11600	80	11600	80	11600

FLAT FACE - QCF SERIES

METRIC (S)



TECHNICAL FEATURES AND OPTIONS



Locking Mechanism
Locking Ball System
+Safety Lock



Flow Rate
Up to 189 l / min



Material
Carbon Steel
Stainless Steel
Brass



Working Temperature
-20 °C / +90 °C



Interchange
16028



How to Connect
Push



Operating Pressure
Up to 250 Bar



Available Threads
BSP - NPT - Metric - SAE



Under Residual Pressure
Connction: Not Allowed
Disconnection: Not Allowed



Body Sizes
ISO 6.3-25




Sealing Description
NBR - FKM



Valve Type
Flat Face

[CLICK HERE FOR 3D SECTION](#)

TECHNICAL DRAWING

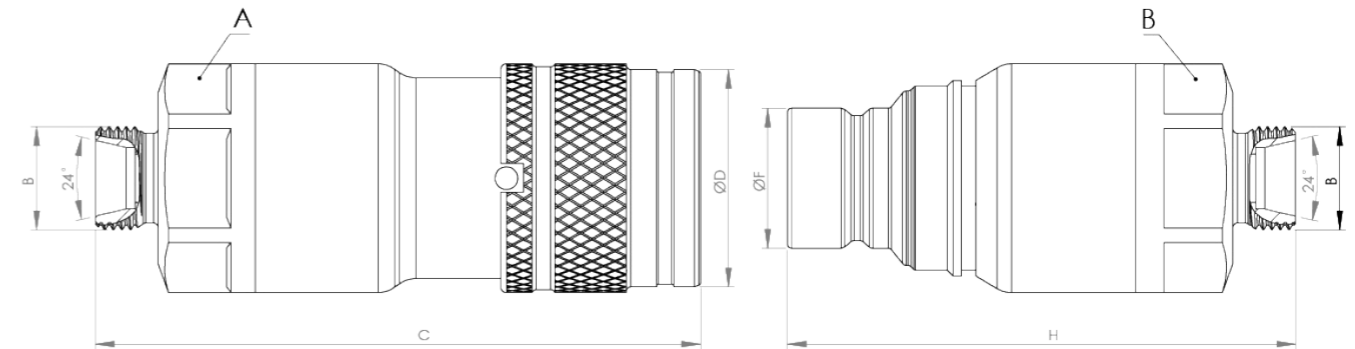


BODY SIZE	DESCRIPTION	COUPLING GENDER	Hex		THREAD SIZE(B)	DIAMETER		LENGTH		WEIGHT				
			mm	inch		mm	inch	mm	inch	kg	lbs			
06	QCF-6A-8S	FEMALE	A	26	1.02	M16*1.5	D	28	1.1	C	84	3.3	0.25	0.55
	QCF-6B-8S	MALE	E	26	1.02	M16*1.5	F	16.15	0.64	H	74	2.91	0.17	0.37
10	QCF-10A-12S	FEMALE	A	30	1.18	M20*1.5	D	32	1.25	C	84	3.30	0.39	0.86
	QCF-10B-12S	MALE	E	30	1.18	M20*1.5	F	19.7	0.77	H	74	2.91	0.25	0.55
12.5	QCF-12A-16S	FEMALE	A	36	1.41	M24*1.5	D	38	1.49	C	99	3.89	0.64	1.41
	QCF-12B-16S	MALE	E	36	1.41	M24*1.5	F	24.5	0.96	H	82	3.22	0.4	0.88
19	QCF-19A-20S	FEMALE	A	41	1.61	M30*2	D	46.1	1.81	C	116	4.56	0.99	2.18
	QCF-19B-20S	MALE	E	41	1.61	M30*2	F	29.9	1.17	H	97	3.81	0.61	1.34
25	QCF-25A-25S	FEMALE	A	50	1.96	M36*2	D	55	2.16	C	123	4.84	1.58	3.48
	QCF-25B-25S	MALE	E	50	1.96	M36*2	F	36	1.41	H	106	4.17	0.99	2.18

ISO 8434-1

BODY SIZE	WORKING PRESSURE						BURST PRESSURE					
	COUPLE		FEMALE		MALE		COUPLE		FEMALE		MALE	
	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI
6	31.5	4568	31.5	4568	31.5	4568	126	18270	126	18270	126	18270
10	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
12.5	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
19	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
25	20	2900	20	2900	20	2900	80	11600	80	11600	80	11600

MAIN APPLICATIONS

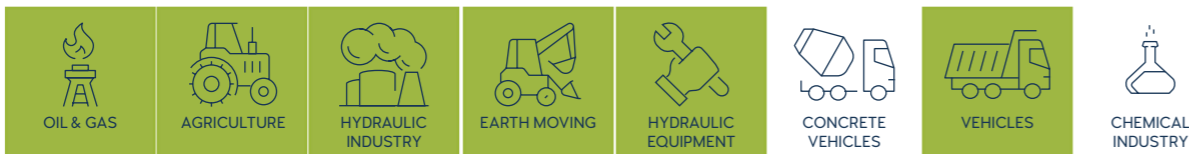

INFORMATION

- Flat face design prevents dirt and dust accumulation in the system.
- Top quality elastomer seals provide maximum sealing and prevent oil leakage during disconnection.
- Laminar flow prevents pressure drops and turbulences.
- Durable, safe, compact and easy to use design.
- Please clean the mating surfaces thoroughly before connecting, in order to prevent contaminants to enter into the system.
- Please make sure that the male and female parts are aligned properly to achieve full connection.
- Safety lock feature prevents accidental disconnection.

WARNING

- Connection and disconnection under dynamic pressure is not allowed.
- Connection and disconnection is not allowed when the temperature of the circulating fluid is above 80°C / 176°F.
- Make sure the system pressure is below the maximum working pressure.
- Please ensure that the OLEOCON product you have chosen is compatible with the temperature, material and pressure requirements of your system.
- Please contact OLEOCON technical support for any further questions.