


# POPET SCREW - QC - STC SERIES

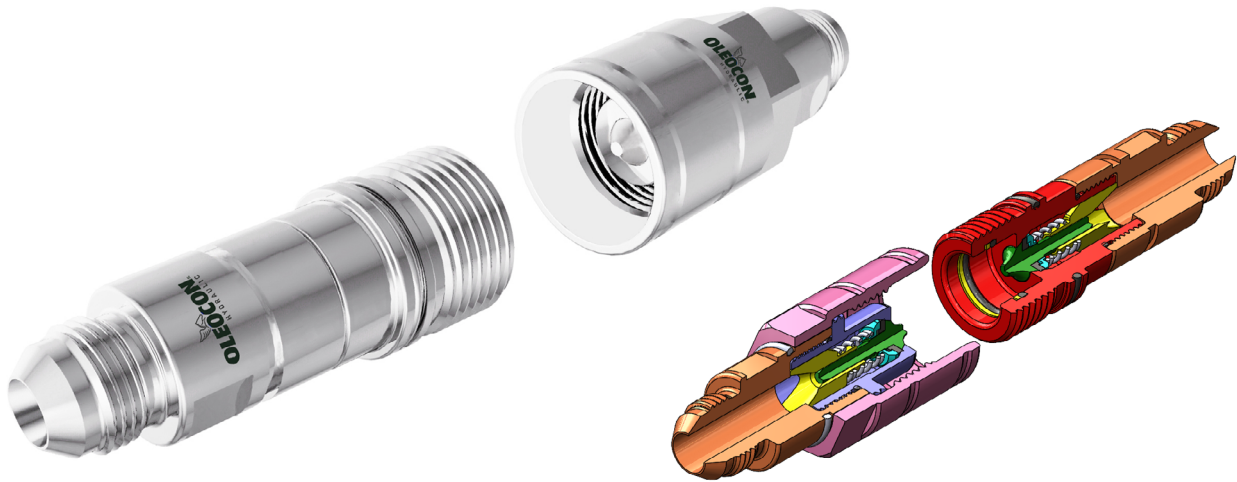

## TECHNICAL FEATURES AND OPTIONS

## 3D SECTION

	Locking Mechanism Screw to Connect		Flow Rate Up to 189 l / min		Material Carbon Steel Stainless Steel
	Working Temperature -20 °C / +90 °C		Interchange ISO 14541		Connection System Screw
	Operating Pressure Up to 350 Bar		Available Threads BSP - NPT - Metric - SAE		Connection Under Pressure Can be Removable Under Residual Pressure
	Available Sizes From 1/4" to 1"		Sealing Description NBR - FKM		Valving Style Popet

## MAIN APPLICATIONS




**WARNING**

- Connection or disconnection during flow and under dynamic pressure is not allowed.
- Connection or Disconnection is not allowed when the internal circuit temperature is higher than 80°C / 176°F
- Usage over the maximum working pressures is not allowed.
- Please ensure that the OLEOCON product series you have chosen is compatible with the temperature , material and pressure requirements of your system.
- Please contact with OLEOCON technical support for any further questions.

**INFORMATION**

- Connection or disconnection of the counterparts under residual pressure (max.100 bar) are allowed.
- Top quality sealing rings provides high level of protection.
- The designs are developed to prevent pressure drops and turbulences.
- External o-ring ensures the correct connection of the counterparts and prevents disconnection of the counterparts due to vibration.
- Durable and simple to use design.
- Please ensure the cleanliness of all connection surfaces to avoid dirt or dust accumulation in the circuit.
- Please ensure the alignment and full connection of male and female parts.

## TECHNICAL DRAWING

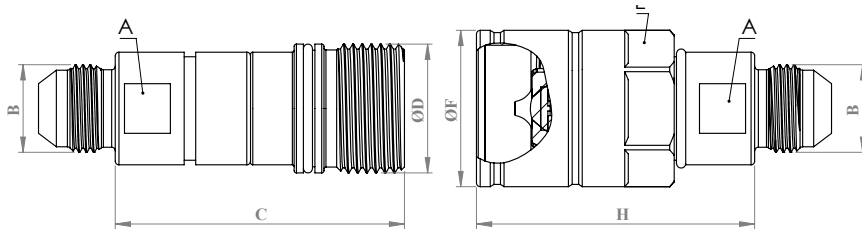

BODY SIZE	DESCRIPTION	COUPLING GENDER	THREAD TYPE	Hex		THREAD SIZE(B)	DIAMETER			LENGTH		WEIGHT			
				mm	inch		mm	inch	mm	inch	kg	lbs			
6,3	QC-STC-6A-MSAE4	FEMALE	BSP	A	17	0,66	7/16-20 UNF	D	M24*2	-	C	61,7	2,42	0,24	0,528
	QC-STC-6B-MSAE4	MALE	BSP	E	30	1,18	7/16-20 UNF	F	34	-	H	59	2,32	0,15	0,33
10	QC-STC-10A-MSAE5	FEMALE	BSP	A	22	0,86	1/2-20UNF	D	M28*2	-	C	62,9	2,47	0,22	0,484
	QC-STC-10B-MSAE5	MALE	BSP	E	30	1,18	1/2-20UNF	F	34	-	H	60,5	2,38	0,19	0,418
	QC-STC-10A-MSAE6	FEMALE	BSP	A	22	0,86	9/16-18 UNF	D	M28*2	-	C	62,9	2,47	0,23	0,506
	QC-STC-10B-MSAE6	MALE	BSP	E	30	1,18	9/16-18 UNF	F	34	-	H	60,5	2,38	0,2	0,44
	QC-STC-10A-MSAE8	FEMALE	BSP	A	22	0,86	3/4- 16UNF	D	M28*2	-	C	62,9	2,47	0,23	0,506
	QC-STC-10B-MSAE8	MALE	BSP	E	30	1,18	3/4- 16UNF	F	34	-	H	60,5	2,38	0,2	0,44
12,5	QC-STC-12A-MSAE8	FEMALE	BSP	A	27	1,06	3/4- 16UNF	D	M36*2	-	C	69	2,71	0,36	0,792
	QC-STC-12B-MSAE8	MALE	BSP	E	36	1,41	3/4- 16UNF	F	42,1	-	H	63,8	2,51	0,35	0,77
19	QC-STC-20A-MSAE8	FEMALE	BSP	A	32	1,25	3/4- 16UNF	D	M42*2	-	C	85,5	3,36	0,56	1,232
	QC-STC-20B-MSAE8	MALE	BSP	E	41	1,61	3/4- 16UNF	F	48,5	-	H	76	2,99	0,54	1,188
	QC-STC-20A-MSAE10	FEMALE	BSP	A	32	1,25	7/8- 14UNF	D	M42*2	-	C	85,5	3,36	0,57	1,254
	QC-STC-20B-MSAE10	MALE	BSP	E	41	1,61	7/8- 14UNF	F	48,5	-	H	76	2,99	0,55	1,21
	QC-STC-20A-MSAE12	FEMALE	BSP	A	32	1,25	1 1/16- 12UN	D	M42*2	-	C	85,5	3,36	0,58	1,276
	QC-STC-20B-MSAE12	MALE	BSP	E	41	1,61	1 1/16- 12UN	F	48,5	-	H	76	2,99	0,56	1,232
25	QC-STC-25A-MSAE12	FEMALE	BSP	A	41	1,61	1 1/16- 12UN	D	M48*3	-	C	97,5	3,83	0,8	1,76
	QC-STC-25B-MSAE12	MALE	BSP	E	50	1,96	1 1/16- 12UN	F	54,5	-	H	82	3,22	0,83	1,826

ISO-8434-2

BODY SIZE	WORKING PRESSURE						BURST PRESSURE					
	COUPLE		FEMALE		MALE		COUPLE		FEMALE		MALE	
	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI
6	35	5075	35	5075	35	5075	140	20300	140	20300	140	20300
10	30	4350	30	4350	30	4350	120	17400	120	17400	120	17400
12,5	30	4350	30	4350	30	4350	120	17400	120	17400	120	17400
19	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
25	20	2900	20	2900	20	2900	80	11600	80	11600	80	11600